

AD1200^{Pro}

1200Ws TTL Power Pack Kit



AD1200Pro 1200Ws TTL Power Pack is a powerful, robust and portable battery designed unit. Equipped with one outlet, AD1200Pro supports photographers to freely use outdoors and in the studio. It is powerful enough to overpower the sun allowing photographers to challenge more outdoor photography. This is an ideal unit that takes you to your amazing photography trip.


Fully Support TTL and HSS Embrace More Possibilities

Enjoying the same GODOX 2.4G wireless X system, it's compatible with 7 major camera brands with TTL autoflash system. Plus, with HSS, you can freeze motion, overpower the sun and the ambient light, exploring more photography possibilities.



Precise Control and Stable Output

- You can precisely control the power setting in 0.1 stop increment from 1/256 to full power, which offers you more spaces on creation. Easily setting and easier to well control the lighting.
- The equipment should never limit your creation. You can freeze the motion, instant movement and so on with fast recycling time (0.01-2 seconds) and short flash duration (up to 1/10860 seconds).
- Enables you to deliver professional, nature, and pristine results in any application, saving your post-production time and money as the accurate color temperature over the whole power range under stable color temperature mode (assures ±75K).

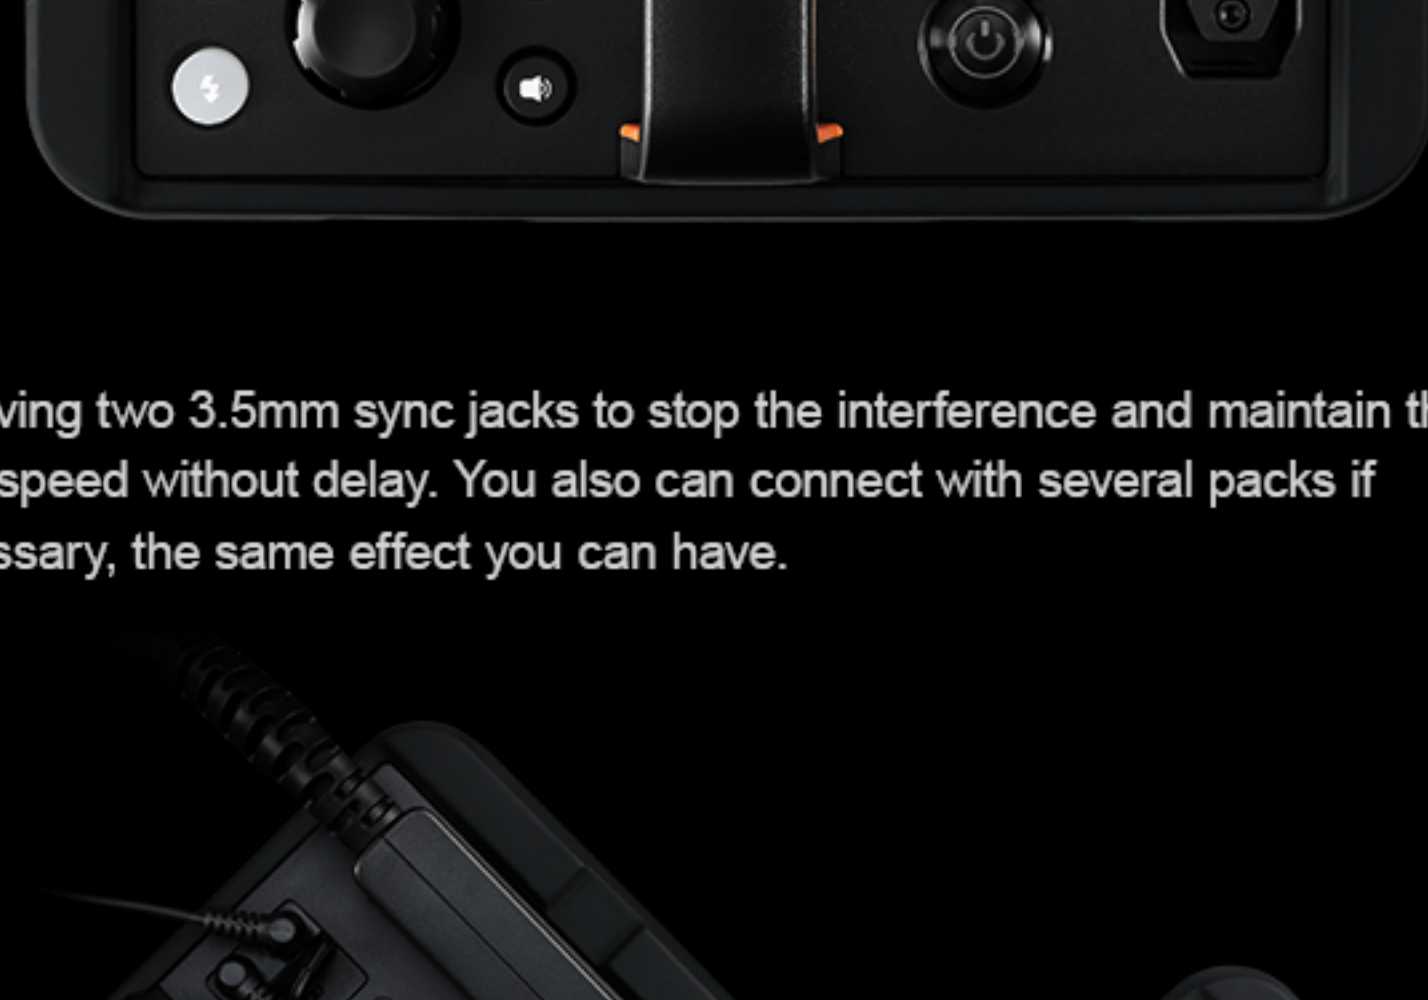

- Having two 3.5mm sync jacks to stop the interference and maintain the sync speed without delay. You also can connect with several packs if necessary, the same effect you can have.




The Perfect Battery Configuration

- WB1200H (36V/5200mAh) large battery capacity offers 500 flashes at 1/1 power, 1000 flashes at 1/2, 2000 flashes at 1/4, 4000 flashes at 1/8...., allowing you to work in large photography workload, meanwhile, release your working pressure by having this "monster".
- A battery option WB1200 (36V/2600mAh) as carry-on baggage for traveling by Air.



Small Head, Big Versatility

- The lightweight flash head with the Bowens mount allows you to attach hundreds of modifiers.
- Steplessly dimmable 40Ws modeling light provides the clear preview of the light, and enables to take the short video.
- Excellent cooling system.

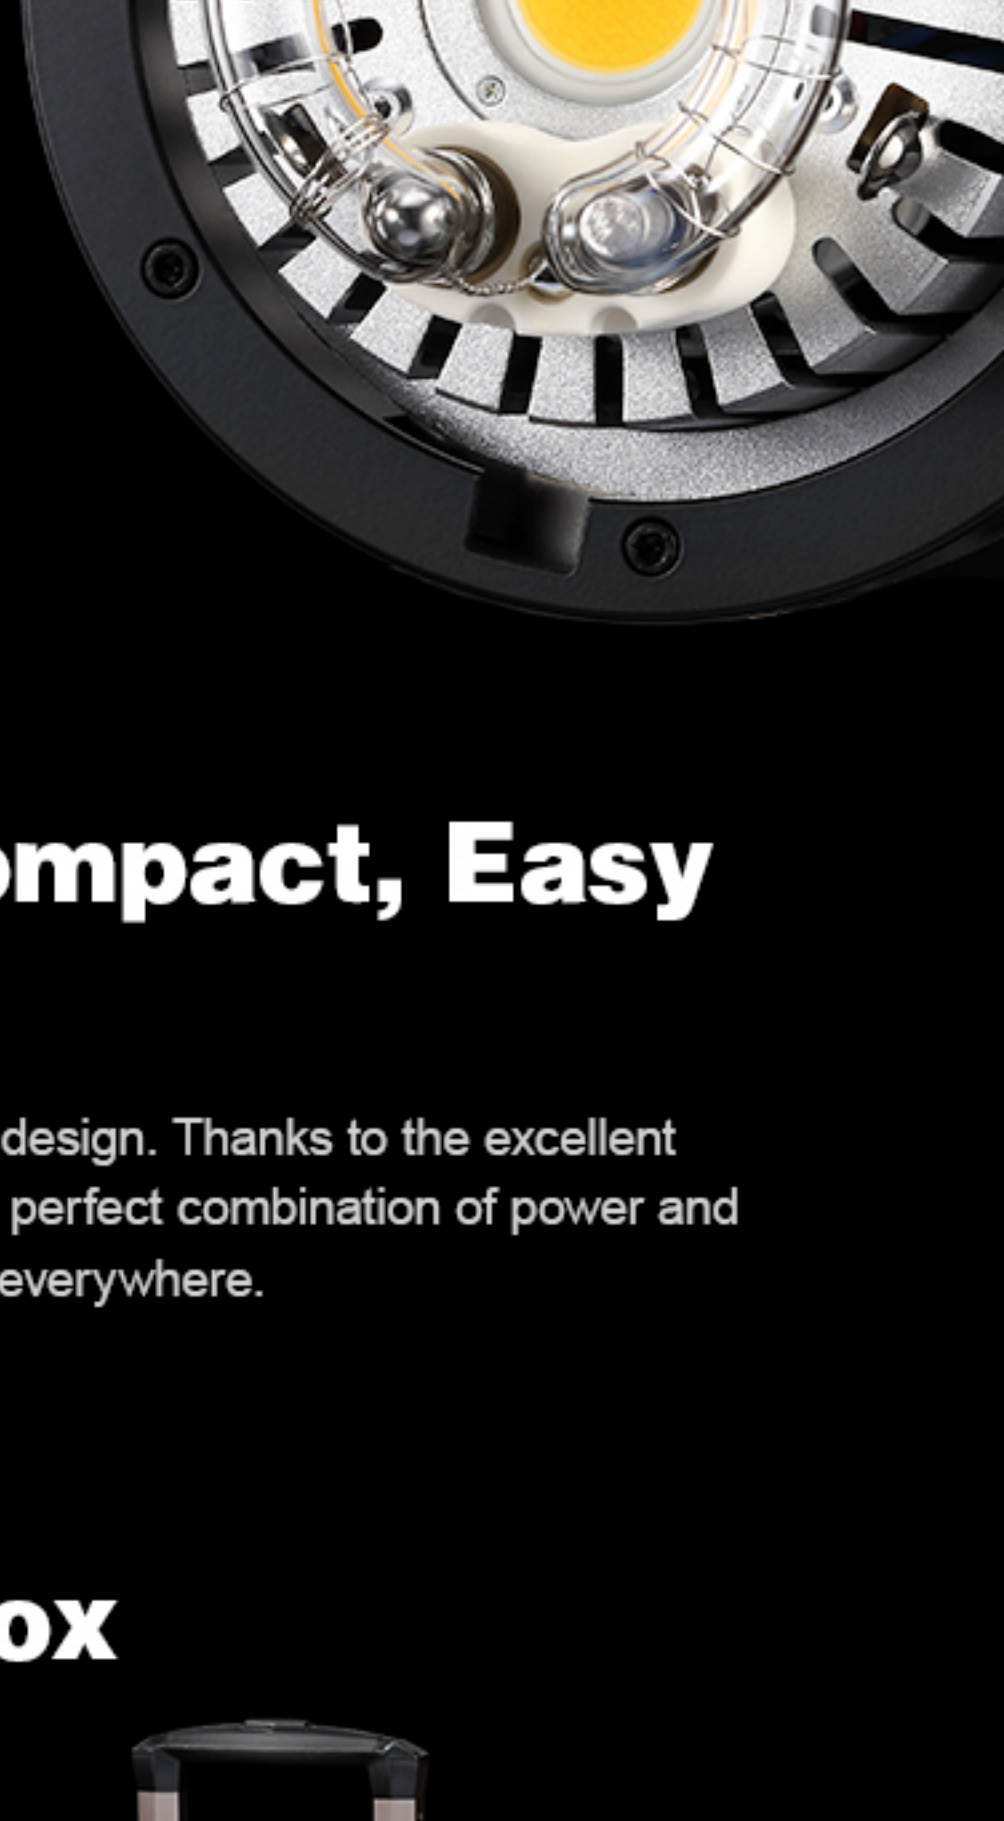

Portable and Compact, Easy to Take


AD1200Pro is in a compact and portable design. Thanks to the excellent battery-powered system, AD1200Pro is a perfect combination of power and portability which is easy for you to take it everywhere.

What's in The Box


- AD1200Pro TTL Power Pack x 1
- Flash Head x 1
- Lithium Battery x 1
- Battery Charger x 1
- Power Cable x 1
- Reflector x 1
- Glass Lamp Cover x 1
- Rolling Case x 1
- Carrying Case x 1
- Instruction Manual x 1




Optional Purchase

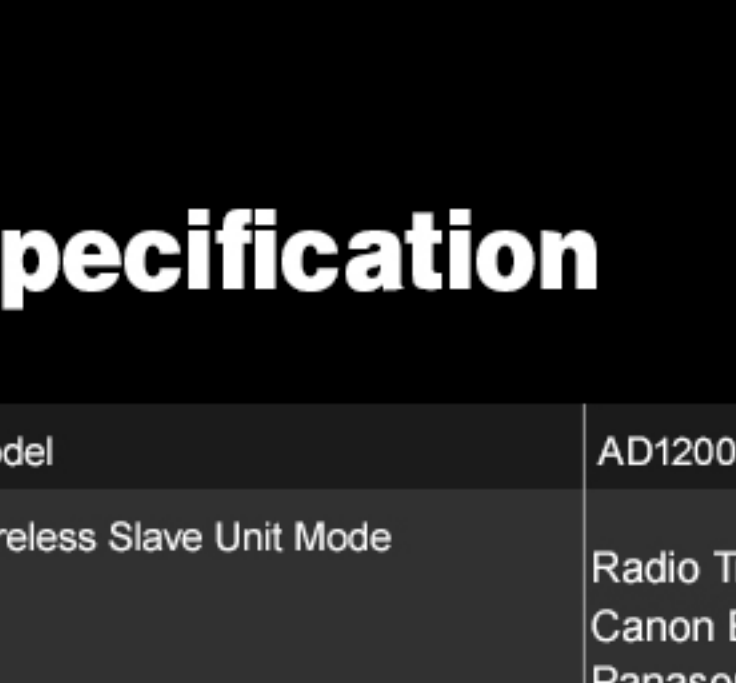


WB1200 Battery allowed for carrying in flight

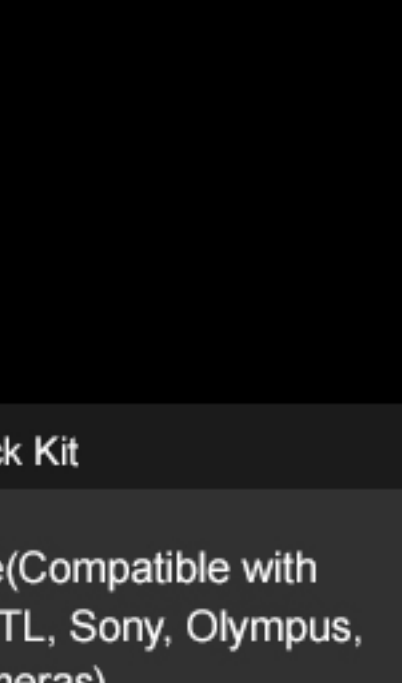

Ring flash head

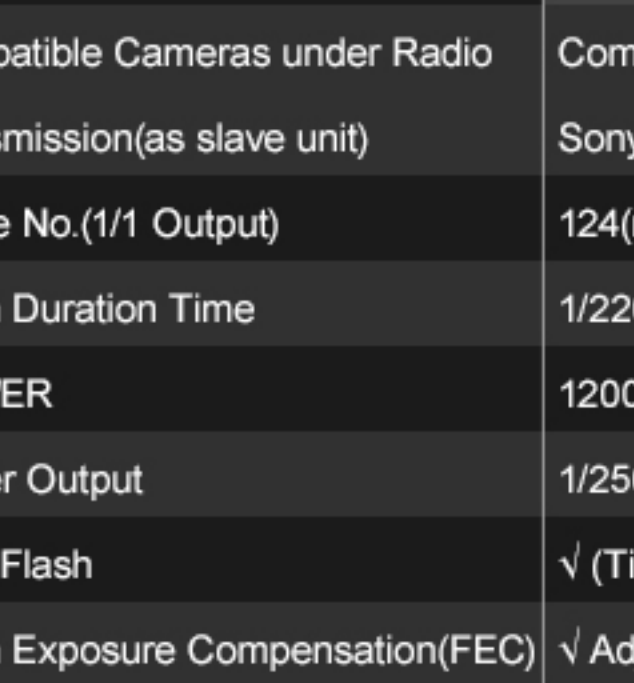

EC1200 Flash head extension cord

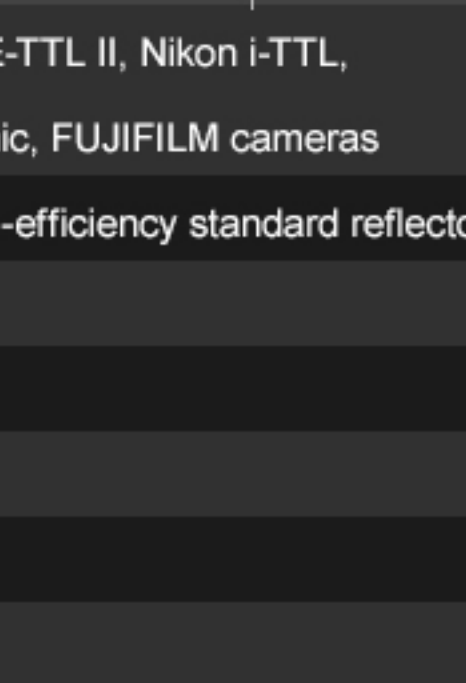

AC1200 AC adapter

Specification

Model	AD1200Pro TTL Power Pack Kit	
Wireless Slave Unit Mode	Radio Transmission Mode(Compatible with Canon E-TTL II, Nikon i-TTL, Sony, Olympus, Panasonic, FUJIFILM cameras)	
Flash Mode	Wireless Off	M/Multi
	Slave Unit of Radio Transmission	TTL/ M/Multi
Compatible Cameras under Radio Transmission(as slave unit)	Compatible with Canon E-TTL II, Nikon i-TTL, Sony, Olympus, Panasonic, FUJIFILM cameras	
Guide No.(1/1 Output)	124(m ISO 100, with high-efficiency standard reflector)	
Flash Duration Time	1/220s~1/10860s	
POWER	1200Ws	
Power Output	1/256~1/1	
Multi Flash	√ (Times: 100; Hz: 100)	
Flash Exposure Compensation(FEC)	√ Adjust on the trigger	
Sync Mode	HSS(up to 1/8000s), First-curtain sync, Second-curtain sync	
Delay Flash	0.01~30s	
Mask	√	
Fan	√	
Beeper	√	
Modeling Light	40W	
Optic Slave Flash	S1/S2	
Flash Duration Indication	√	
Display	LCD panel	
*Wireless Flash(2.4G wireless transmission)		
Wireless Flash Function	Slave, Off	
Controllable Slave Groups	2.4G	5 Groups: A, B, C, D, E
Transmission Range(approx)	2.4G	100m
Channels	2.4G	32 Channels: 1~32
Wireless ID	2.4G	To avoid signal interference effectively, triggering can only be achieved when the channels and wireless IDs of the master and slave unit are set to the same.
*Power		
Power Supply	Lithium Battery (36V/5200mAh)	
Flash Times in Full Power	500	
Recycling Time	0.01-2s	
Battery Level Indicator	√	
Energy-saving	Power off automatically after 30~120mins of idle operation	
Sync Triggering Mode	3.5mm sync cord	
Color Temperature	5600K±200K	
*Size		
Dimensions	Flash head: 12.5x23*20cm (including the reflector) AD1200Pro TTL Power Pack: 23.5x14.5x26cm	
One Kit Weight	8.25 Kg	